

EVAK AGIVORT

heavy duty submersible slurry pumps with agitator






Agivort submersible agitator pumps are designed for arduous slurry handling applications. Available in 230/1/50 Auto and 400/3/50, they are constructed primarily from FC200 cast iron with heavy grade 304 stainless steel motor housing.

- Double Mechanical Seal
Upper Ca/Ce - Lower Sic/Sic
- Oil chamber with NBR oil seal
- 316 Stainless steel agitator
- 5.05/5.10 Nylon 6 Motor cover/Handle
5.20/5.50 FC200 Motor cover/SS41 Handle
- 10m H07RN-F cable as standard
- Internal capacitor 1~ models
- Weights: 5.05 = 13kg - 5.10=18kg -
5.20 = 33kg - 5.50 = 56kg.
- *Larger models 5.5kW, 3"-4" discharge available to order.*



AGIVORT 5.05/5.10

AGIVORT 5.20/5.50

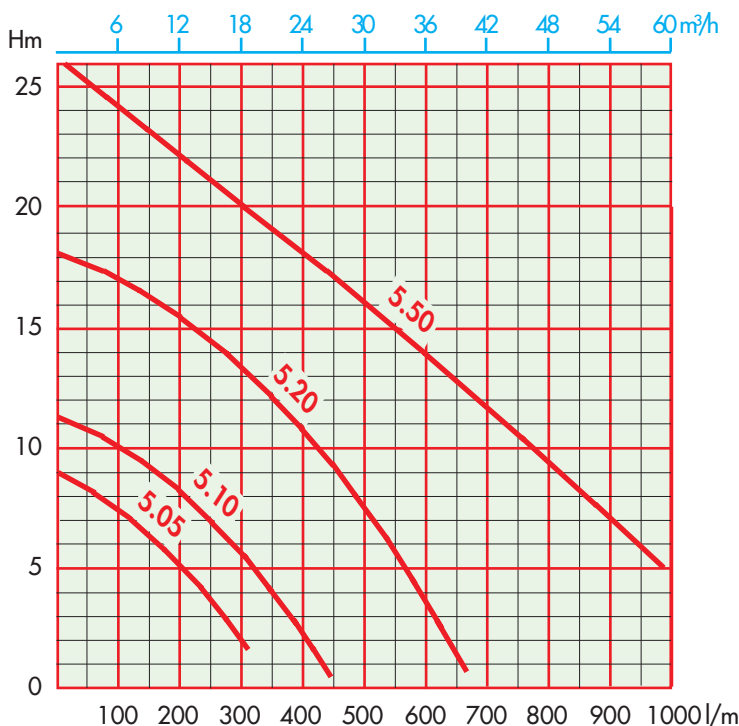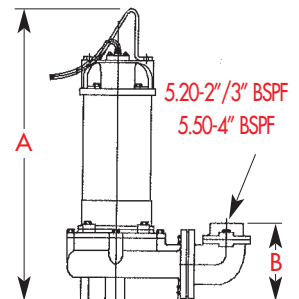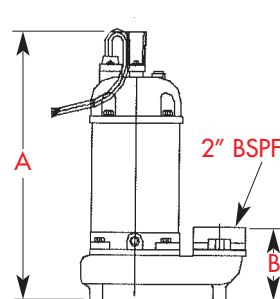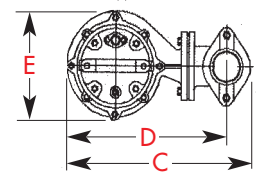

TECHNICAL DATA

MODEL	NOM kW	NOM Amp		DIMENSIONS mm				
		1~	3~	A	B	C	D	E
AGIVORT 5.05	0.37	4.0	-	412	138	228	193	150
AGIVORT 5.10	0.75	6.0	2.0	487	138	228	193	150
AGIVORT 5.20	1.5	11.3	3.5	532	152	390	350	210
AGIVORT 5.50	3.7	-	8.6	633	206	470	367	218

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

