

TYPE P2BPTABBALKO AUTOMATIC CONTROL BOX

D.O.L. Starters for Nominal 18-40HP Three Phase Pumps

For dirty water and sewage applications.



FEATURES

BOX: Sheet steel box with double hinge to left hand side and key lock to right. 4 x wall mounting brackets. IP55 enclosure.

LID: Yellow Light = Mains supply.
Green Light = Pump running.
Right Red Light = High level alarm.
Left Red Light = Thermal cut-out.
Door Interlocking Isolator: Isolates the power supply when lid is open.
Hand-Off-Auto Switch.
High powered IP65 Siren alarm.
Alarm on/off switch.

INTERNALS: 100VA Transformer: To reduce 400V supply to 24Vac for level control.
Plug-In Relay: For level controls.
Pre-wired with Klixon relay.
Pre-wired with water-in-oil probe relay.
Contactor with Overload: Manual setting for pump running Amps.
Fuses: Fuse holders with HRC fuses on mains and auxiliary circuits.

Designed for the control and running of 400V three phase pumps, offering protection against dry running, motor overload and water in oil. Suitable for submersible pumps with motor sizes up to a nominal 50 Amps.

MODEL	AMPS MIN/MAX (Ranges)	DIM. CM H x W x D	WEIGHT KG
P2BPTABBALKO	23-50 (23-32 / 30-40 / 37-50)	50 x 40 x 25	19

OPERATION


In operation, the level control system utilises float switches operating on 24Vac. Normally three float switches are required; one upper (high level alarm), one middle (start) and one lower (stop).

TYPICAL SUMP EMPTYING APPLICATION

When the sump liquid level rises, it triggers the middle or 'start' float switch. As the liquid level falls to the set point, it triggers the lower float switch, turning the pump off. If for any reason the pump does not start and/or the liquid level rises to the top float switch, the audible alarm is triggered and the alarm indicator light on the panel is illuminated.

As a guide, it is recommended that the pump cycle should not be repeated more than 6 times per hour. In a filling application, the cycle is simply reversed.

TYPICAL SUMP EMPTYING APPLICATION

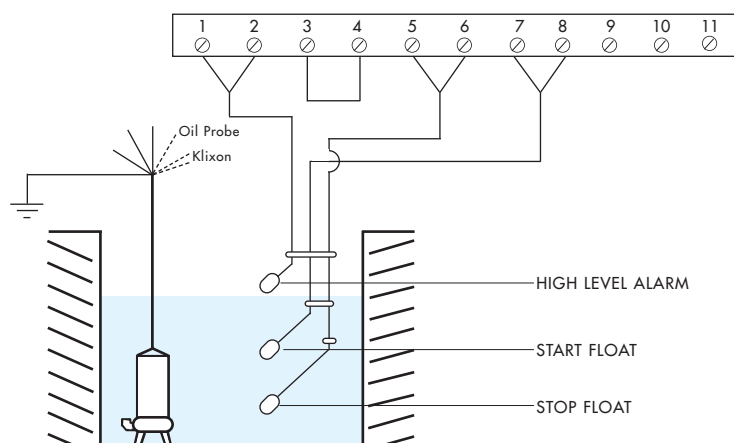

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

