

EGO 500GI

Plastic drainage pumps for tight sump applications



These 240/1/50 pumps are designed for handling clean, dirty or slightly polluted water. They feature an integral float switch, making them particularly useful for tight sump and restricted access applications.

At the flick of a switch, these models can be locked into either automatic or manual operation. In automatic mode the pump will start at approx. 115mm and pump down to a level of approx. 55mm. On manual, the pump will pump down to 9mm, but should not be left unattended to run dry.

- Built-in thermal protection with auto reset
- Suitable for continuous duty up to 35°C
- Open impeller for 9mm soft solids passage
- 10m H07RN-F cable and plug as standard
- Supplied with non-return valve and variable hoesail as standard.

Materials





The EGO 500 is designed for heavy duty applications using antioxidant and corrosion resistant materials.

Pump casing, body and impeller in PPS (Polyphenylene Sulphide)

Stainless steel motor casing/shaft.

Special wear resistant shaft coating.

Special triple shaft seal.

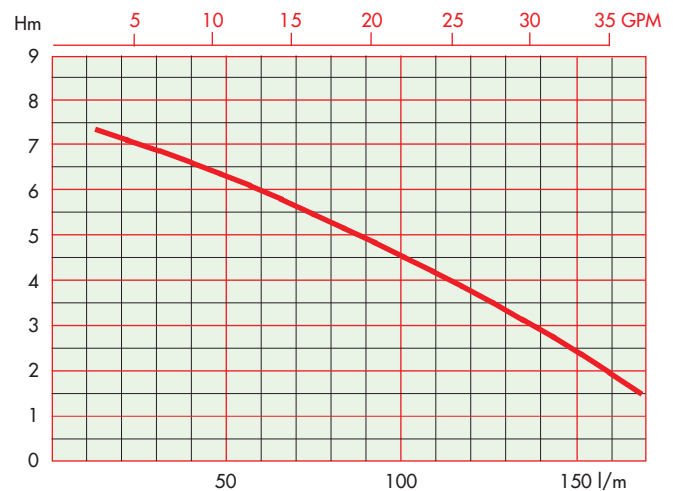

TECHNICAL DATA

MODEL	NOMINAL		AMP	DIMENSIONS mm		
	W	HP		A	B	DN
EGO 500GI	470	0.63	2.1	252	206	25

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

