



EGO 500SELS

Plastic drainage pumps for low suction applications




Motor/Materials


The EGO 500SELS has a 0.47kW motor running at Nom. 2.1Amp. It is manufactured using antioxidant and corrosion resistant materials. Pump casing, body and impeller in PPS, Stainless steel motor casing/shaft. Special wear resistant shaft coating with triple shaft seal.

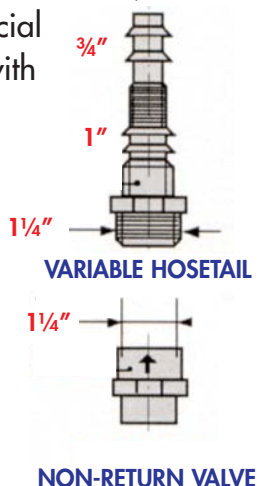

These 240/1/50 pumps are designed for handling clean or slightly polluted water. They feature an electronic adjustable Start/Stop facility, making them particularly useful for tight sump and low level (down to 1mm) pumping applications.

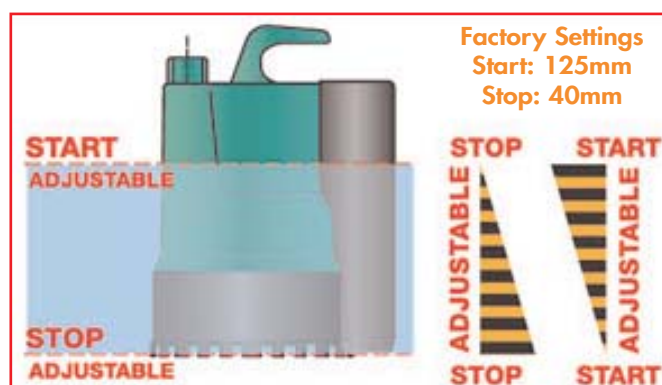

- Built-in thermal protection with auto reset
- Suitable for continuous duty up to 35°C
- 10m H07RN-F cable and plug as standard
- Supplied with non-return valve and variable hoesail as standard.

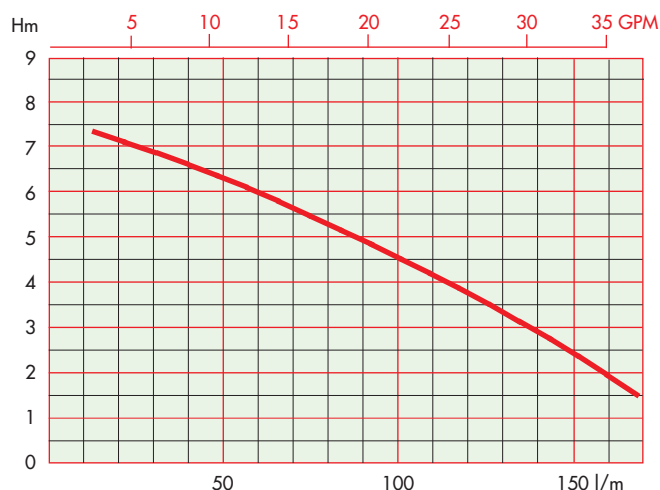

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

