

GMP - SERIES BKQ/A-ST


Self Priming Dirty Water/Sewage Pumps

**B2KQ/A-ST**

Available in 230/1/50 and 400/3/50 models, these pumps have a special three blade impeller designed for arduous dirty water and sewage type applications.


These 'Semi-Trash' pumps feature high specification mechanical seals and stainless steel wear discs. A quick access inspection door under the suction valve facilitates checking and removal of any clogging material.

An additional 4"/5.5HP model, not illustrated, is also available. It has a closed valve head of 14m and a max. flow of 2000 l/m.

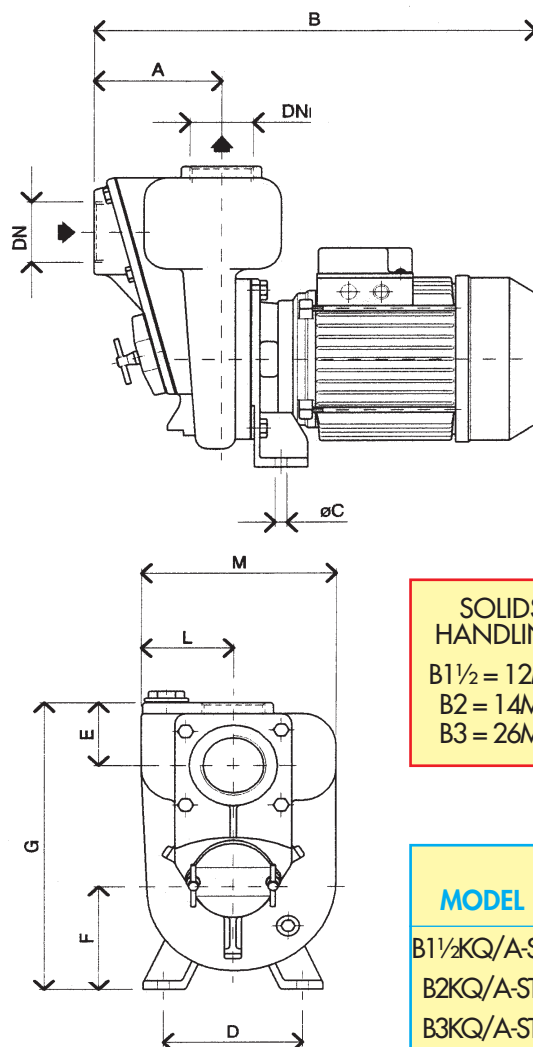

SOLIDS HANDLING

B1½ = 12MM
B2 = 14MM
B3 = 26MM

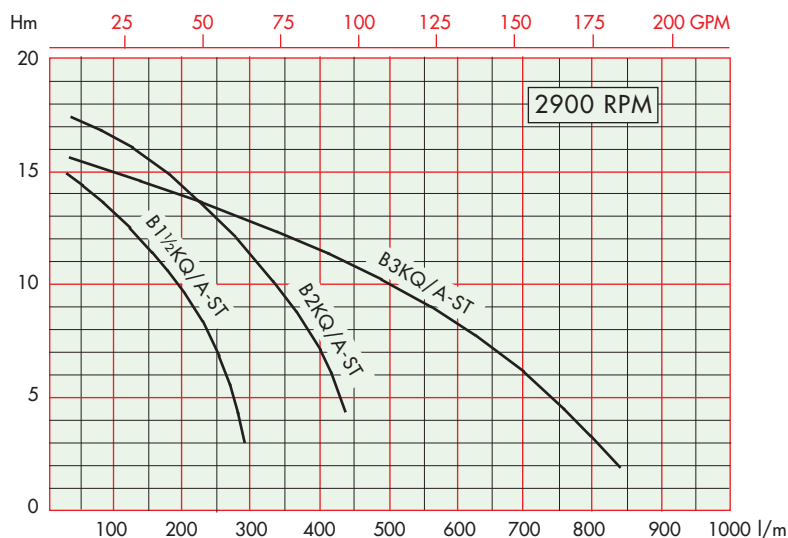

| MODEL | NOMINAL | | Nom Amp | | DIMENSIONS mm | | | | | | | | | | | Weight Kg |
|------------|---------|-----|---------|-----|---------------|-----|-----|------|-----|----|-----|-----|----|-----|----|-----------|
| | kW | HP | 1~ | 3~ | DN | A | B | diaC | D | E | F | G | L | M | | |
| B1½KQ/A-ST | 0.75 | 1.0 | 6.2 | 1.8 | 1½" | 104 | 375 | 11 | 132 | 56 | 106 | 300 | 80 | 178 | 20 | |
| B2KQ/A-ST | 1.50 | 2.0 | 9 | 4 | 2" | 122 | 410 | 11 | 132 | 64 | 106 | 300 | 87 | 184 | 24 | |
| B3KQ/A-ST | 2.20 | 3.0 | 13 | 5 | 3" | 147 | 445 | 11 | 132 | 67 | 106 | 300 | 88 | 184 | 29 | |

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

