



# MAXI HA

## Vortex impeller submersible for 50mm solids handling

The 400/3/50 Maxi HA submersible is designed for heavy duty waste water and sewage applications, with pumped media containing solids in suspension up to 50mm dia. at temperatures up to 40°C.

It features a six blade vortex impeller mounted on a reduced length shaft designed for high hydraulic efficiency.

- G250 cast iron construction
- Mechanical seal - FG1 20
- Lip seal and O-rings in Nitrile
- Oil chamber
- Class H 1450rpm motor suitable for >15 starts per hour
- 10m Neoprene HO7RN-F cable as standard
- 230/1/50, ATEX, 316 Stainless Steel and Marine Bronze options.

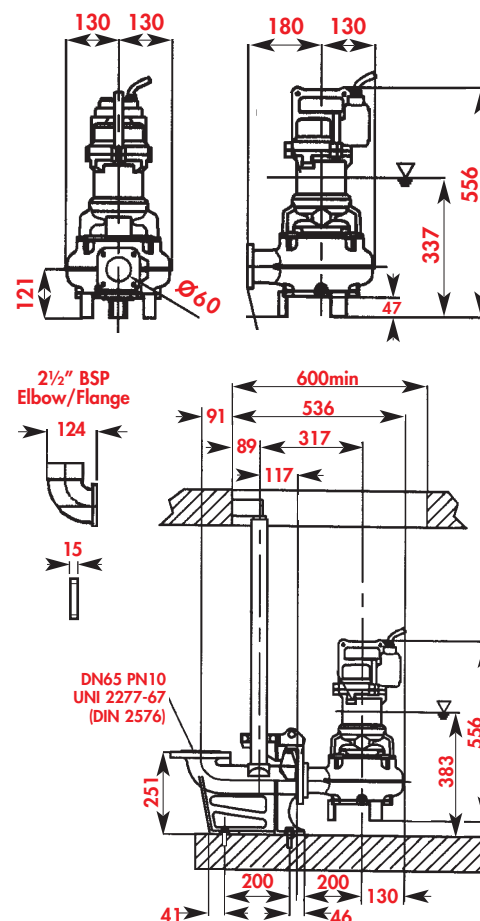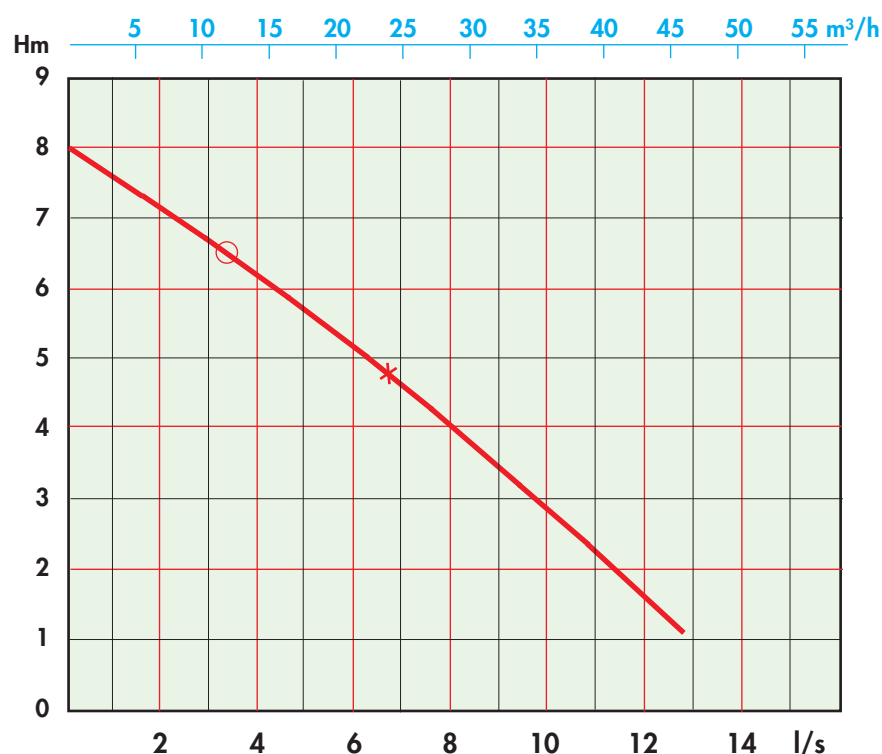

MODEL	kW P <sub>2</sub>	Amps		Weight Kg	Best Efficiency		
		Run	Start		kW-Abs	mH	l/s
MAXI HA	1.0	3.0	12.0	42	1.2	4.7	6.67

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

