


MAXI HC

Single channel impeller for 76mm solids handling


The 400/3/50 Maxi HC submersible is designed for heavy duty applications with pumped media containing solids in suspension up to 76mm dia at temperatures up to 40°C and densities to 1.2kg/dm³.

It features a single channel impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Mechanical seal - silicon carbide/carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Asynchronous 3-phase motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard.
- Guiderail and Eex d IIB T4 versions available.

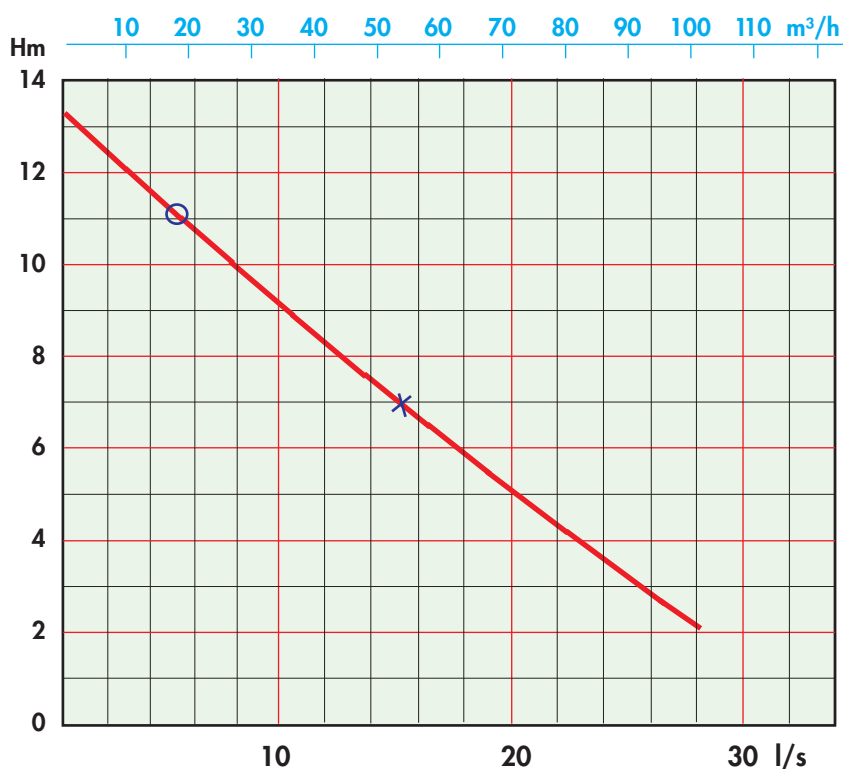

MODEL	kW	Nom. Amps	RPM	Weight Kg	Best Efficiency		
	Nom. P ₂				kW	mH	l/s
MAXI HC	2.8	6.5	1450	70	2.6	7.0	15

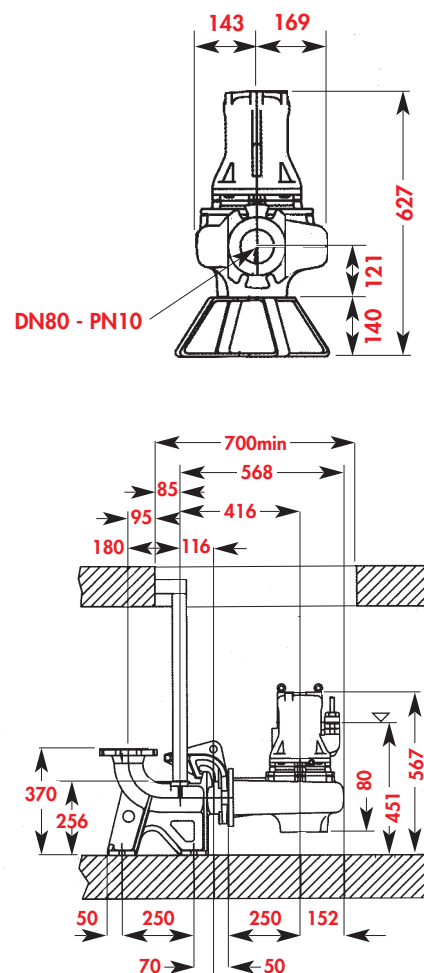

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

