


MAXI HE


Vortex impeller submersible for 64mm solids handling

The 400/3/50 Maxi HE submersible is designed for heavy duty, waste water applications with pumped media density to max. 1.2kg/dm³, containing solids in suspension up to 64mm dia. at temperatures up to 40°C. It features a vortex impeller mounted on a reduced length shaft designed for high hydraulic efficiency.

- G250 cast iron construction
- Mechanical seal - silicon carbide/carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Asynchronous 1392rpm motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard.
- Guiderail and Eex d IIB T4 versions available.

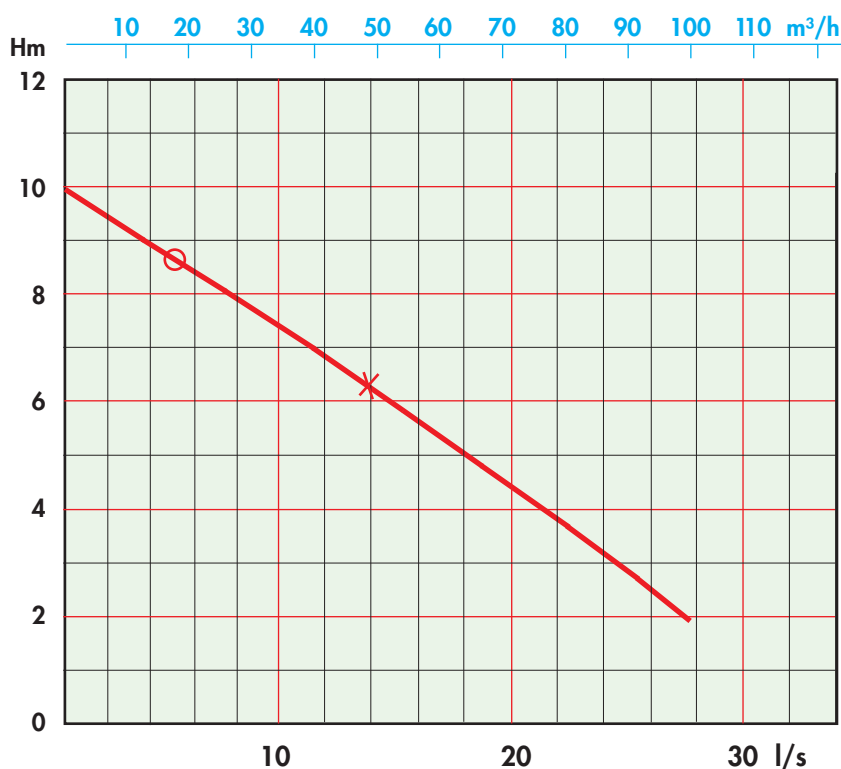

MODEL	Nominal kW P ₂	Nom. Amps	Weight Kg	Best Efficiency		
				kW	mH	m ³ /hr
MAXI HE	3.2	6.2	64	2.3	6.3	48.7

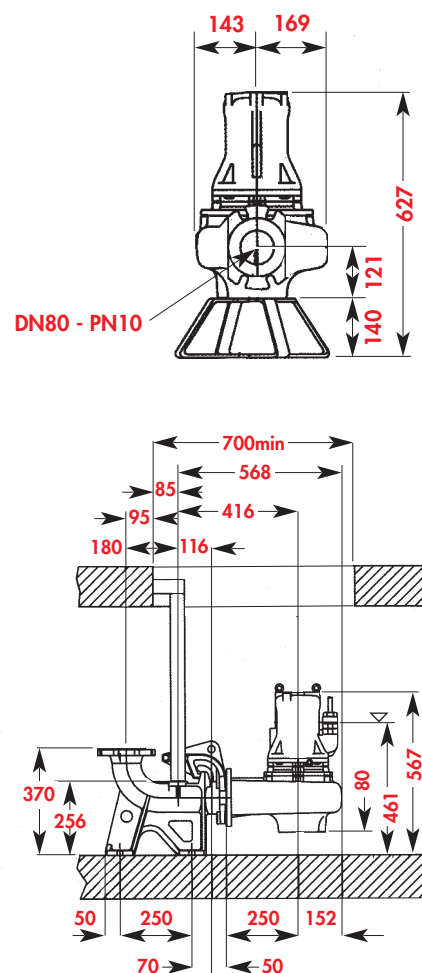

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

