





# MAXI HG

## Double channel impeller for 80mm solids handling

The 400/3/50 Maxi HG submersible is designed for heavy duty applications with screened waste or drainage water containing solids in suspension up to 80mm dia at temperatures up to 40°C.

It features a double channel impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Twin mechanical seal - lower silicon carbide/carbide
- O-rings in Nitrile
- Oil chamber
- Asynchronous 950 rpm Class H motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard
- Pre-wired with thermal protection and water in oil probe
- Freestanding, Guiderail and ATEX options available.

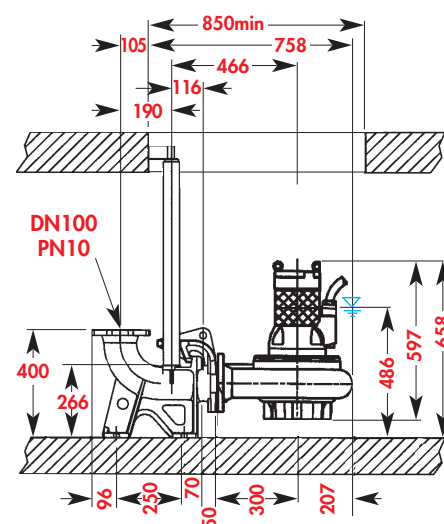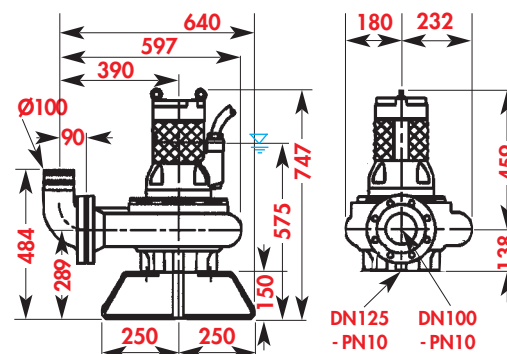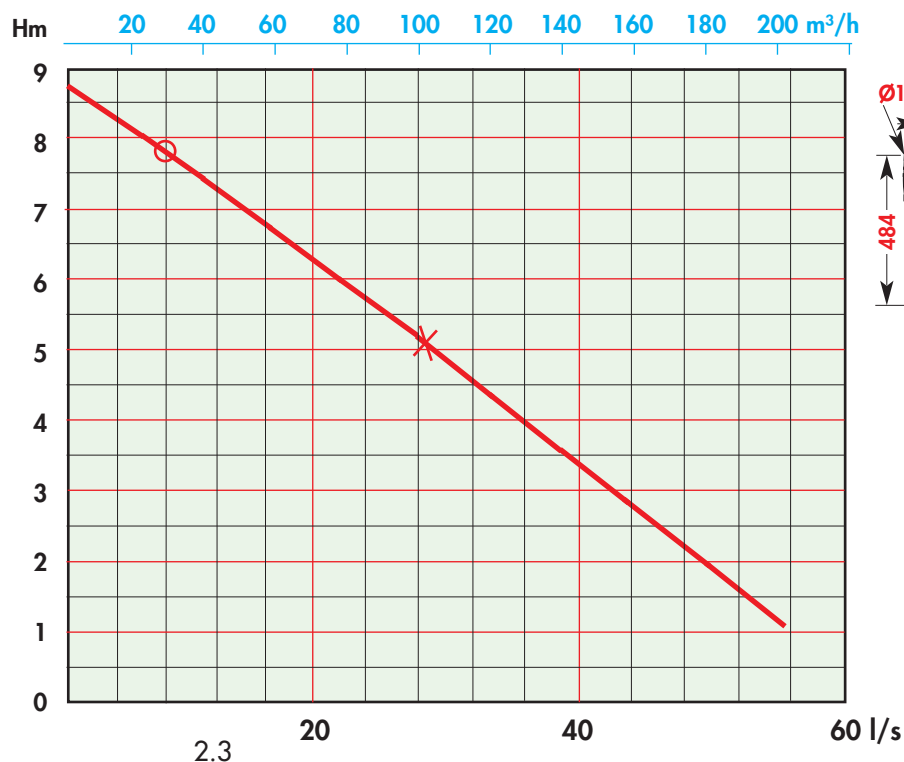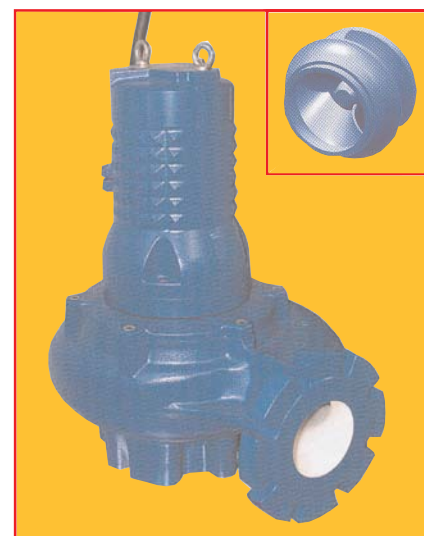

MODEL	Nom. kW	Nom. Amps	Start Amps	Weight Kg	Best Efficiency		
					kW	mH	m³/hr
MAXI HG	2.8	6.6	31.0	111	2.7	5.1	100.0

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

