


MAXI HM



Vortex impeller for 50mm solids handling

The 230/1/50 or 400/3/50 Maxi HM submersible is designed for heavy duty waste water and sewage applications, with pumped media containing solids in suspension up to 50mm dia. at temperatures up to 40°C. It features a six blade vortex impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Mechanical seal - silicon carbide/carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Motor suitable for >15 starts per hour
- 10 metres of Neoprene HO7RN-F cable as standard.
- Guiderail and Eex d IIB T4 versions available.

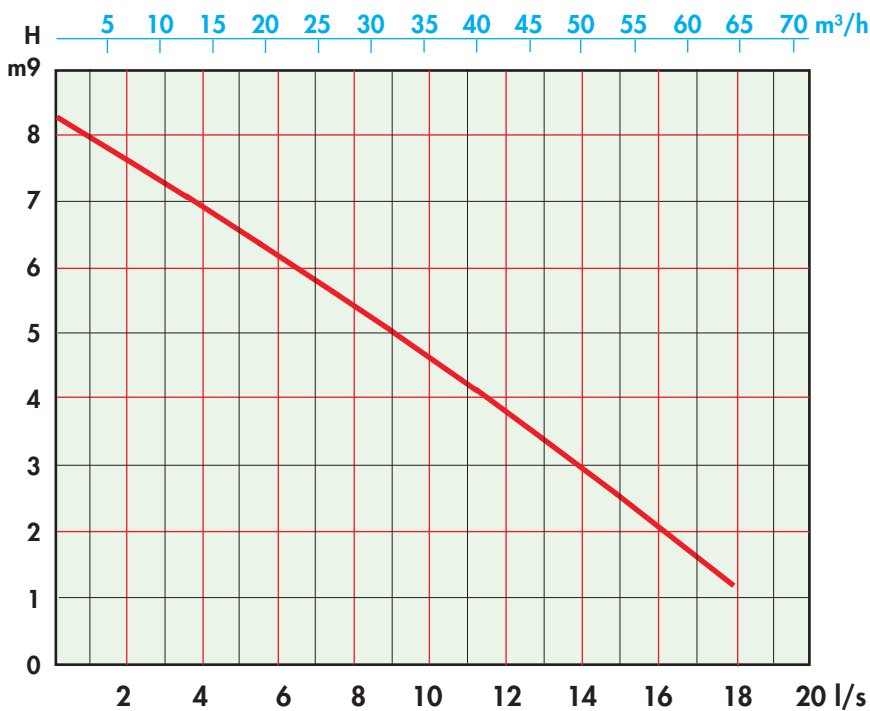

MODEL	Power	Nom. kW	Nom. Amps	RPM	Weight Kg
MAXI HM-M	230/1/50	1.2	8.5	1450	47
MAXI HM-T	400/3/50	1.4	3.5	1450	47

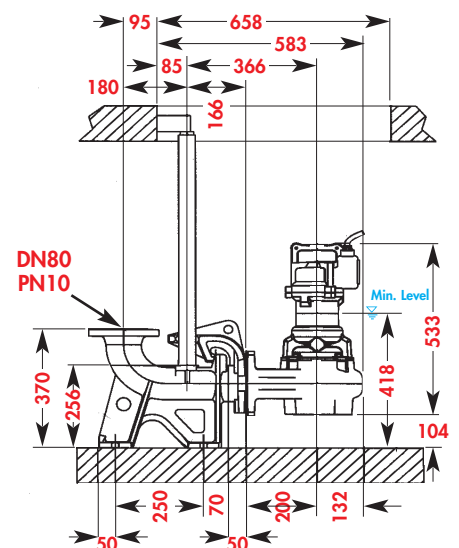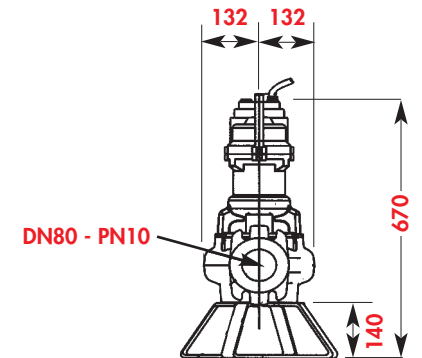

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

