



MAXI HV

Single channel impeller submersible for 40mm solids handling

The 400/3/50 Maxi HV submersible is designed for heavy duty waste water applications, with pumped media density to max. 1.2kg/dm³. It can handle solids in suspension up to 40mm dia. at temperatures up to 40°C.

It features a single channel impeller mounted on a reduced length shaft designed for high hydraulic efficiency.

- G250 cast iron construction
- Mechanical seal - silicon carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Asynchronous 2850rpm motor suitable for >15 starts per hour
- 10m Neoprene HO7RN-F cable as standard
- ATEX, 316 Stainless Steel and Marine Bronze options.

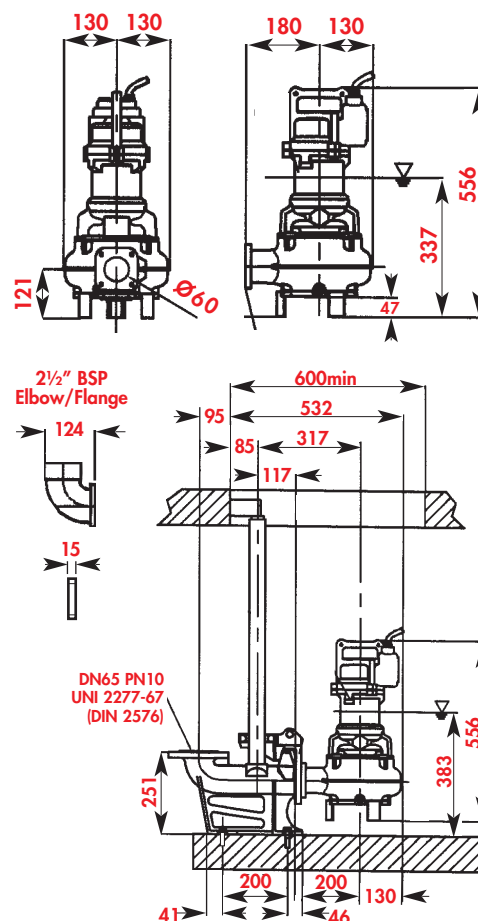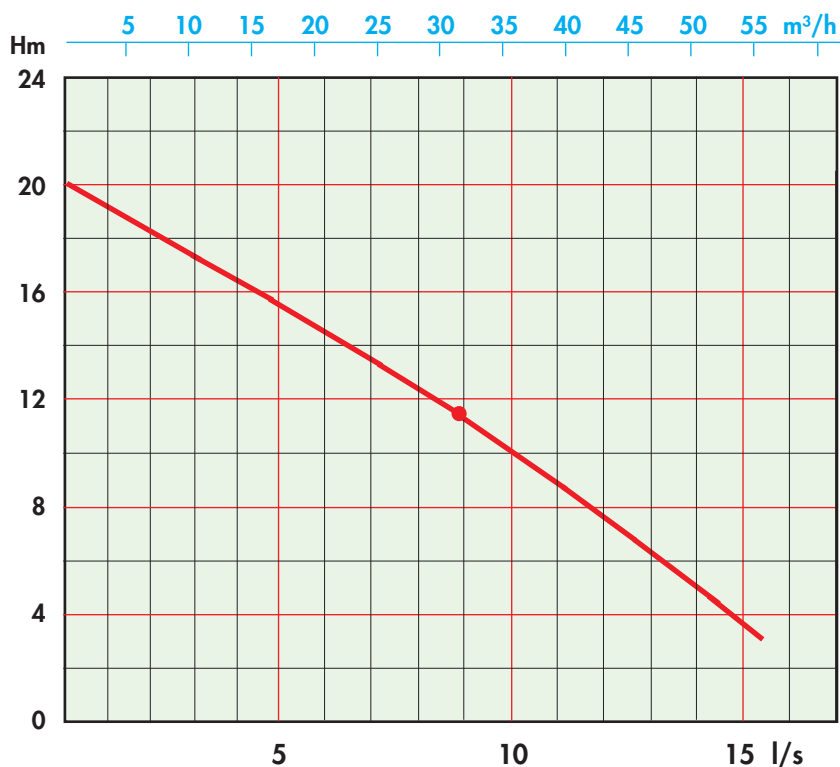

MODEL	kW P ₂	Amps		Weight Kg	Best Efficiency		
		Run	Start		kW	mH	l/s
MAXI HV	2.8	6.0	25.2	45	2.5	11.4	8.9

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

