

# MIZAR

## Stainless Steel Submersible Drainage Pumps





Stainless steel drainage pumps designed for clean and dirty water for domestic, commercial and industrial users emptying sumps, tanks, cellars, pools, etc. Maximum submersion is 5m. Pumps feature silicon carbide mechanical seal in oil bath and lip seal. They also have a thermal protector in the windings and are suitable for a maximum liquid temperature of 50°C (122°F). Pump body, motor housing, suction grid, diffuser and shaft in AISI 304 stainless. Impeller, motor holder and cable top in technopolymer. Mizar 30 and 60 are available in 230/1/50 Auto as standard with a 110/1/50 option (external capacitor box) on the Mizar 60. Supplied with 10m H07RN-F as standard.

For higher capacity models please refer to the REGAL pump data sheet.  
 Discharge 1½" / 2"  
 Flows to 400 l/m  
 Heads to 15m.



MODEL	NOMINAL		MAX AMP	DIMENSIONS mm			WEIGHT Kg	SOLIDS mm
	kW	HP		A	B	C		
MIZAR 30	0.25	0.33	2.6	154	234	1¼" BSP	5.5	10
MIZAR 60	0.45	0.6	230V-3 110V-5.8	154	234	1¼" BSP	6.2	10

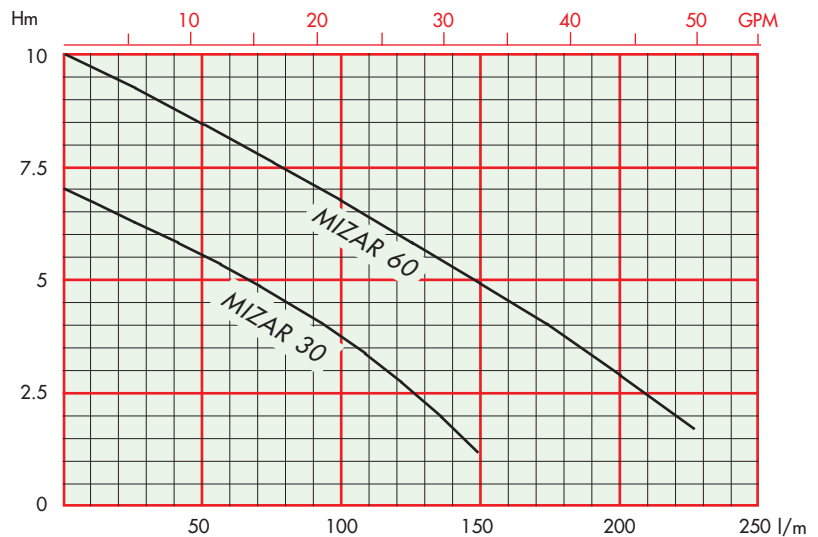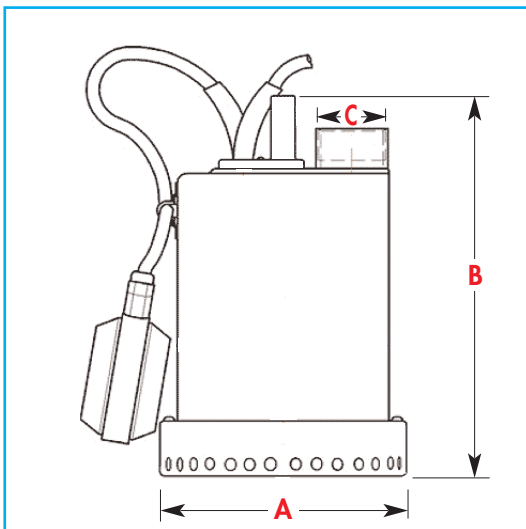

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

