

REGAL

Stainless Steel Submersible Drainage Pumps



These continuously rated drainage pumps are designed for domestic, commercial and industrial users emptying sumps, tanks, cellars, pools, etc.

Due to their all stainless construction they are suitable for pumped media containing up to 20% sand in suspension. Maximum submersion is 5m.

Pumps feature silicon carbide mechanical seal in oil bath and lip seal.

They have a thermal protector in the windings and are suitable for a maximum liquid temperature of 50°C (122°F).

Pump body, motor case, suction grid and impeller in AISI 304 stainless.

All models are available in 230/1/50 with float switch or 400/3/50 with 10m cable as standard. Regal 100 is also available in 110/1/50 with float switch.



NOMINAL AMPS

REGAL 80 - 230/1/50 = 4.5A - 400/3/50 = 2.1A

REGAL 100 - 110/1/50 = 13A (External Capacitor) - 230/1/50 = 6.5A - 400/3/50 = 2.2A.

REGAL 150 - 230/1/50 = 9.6A (External Capacitor) - 400/3/50 = 3.5A

MODEL	NOMINAL		DIMENSIONS mm			WEIGHT Kg	SOLIDS mm
	kW	HP	A	B	C		
REGAL 80	0.6	0.8	213	290	1½" BSP	13.0	10
REGAL 100	0.75	1.0	213	290	1½" BSP	14.0	10
REGAL 150	1.1	1.5	220	335	2" BSP	15.5	10

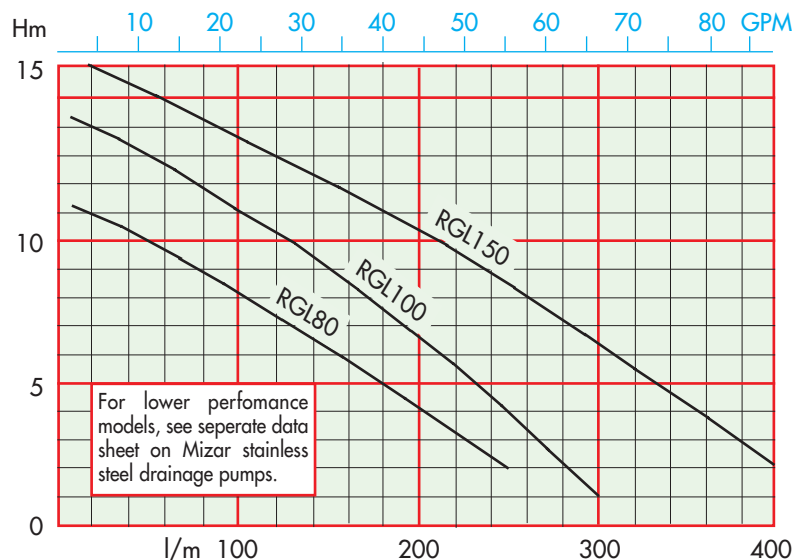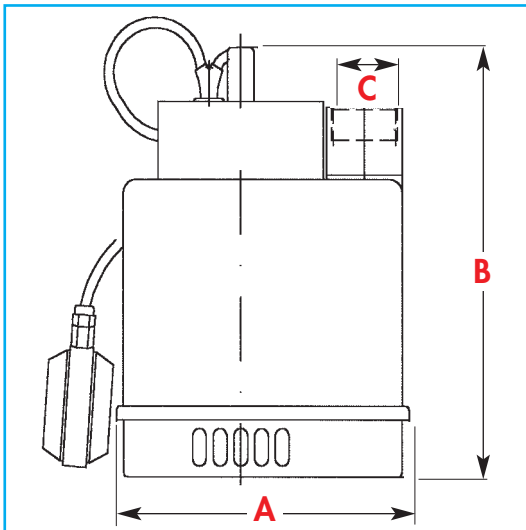

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

