




SRM/T SERIES 100

Multistage Submersible Pumps

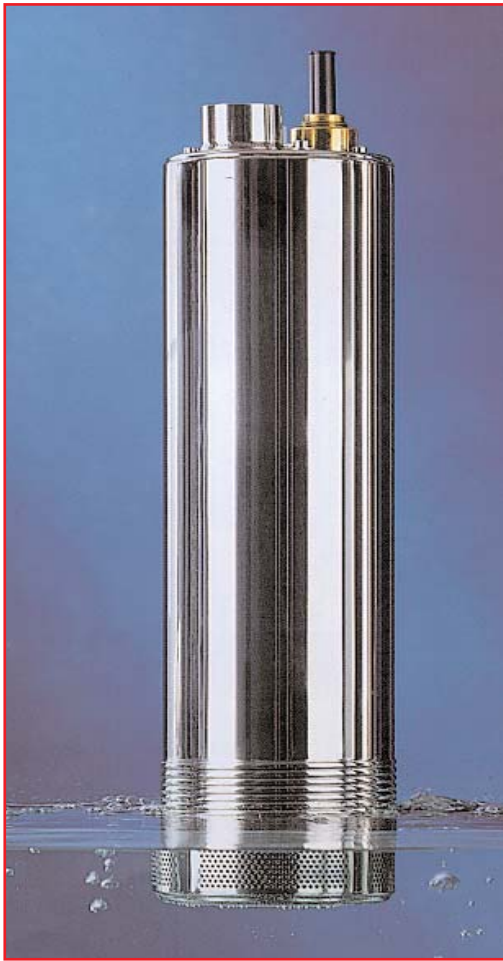

This range of multistage submersibles with centrifugal radial impellers is particularly suitable for high head duties in industrial, civil and agricultural applications.

- 230/1/50 (SRM) and 400/3/50 (SRT)
- External casing, motor casing, foot, shaft, handle and fixings: stainless steel.
- Motor body and top cover: brass.
- Impellers/diffusers: reinforced polycarbonate.
- Mechanical seal: Graphite and Ceramics.
- Supplied with 20m cable as standard.
- Float switch option on single phase models.
- *Other SRM/SRT models available to order with flows to 300 l/m and 600 l/m respectively.*

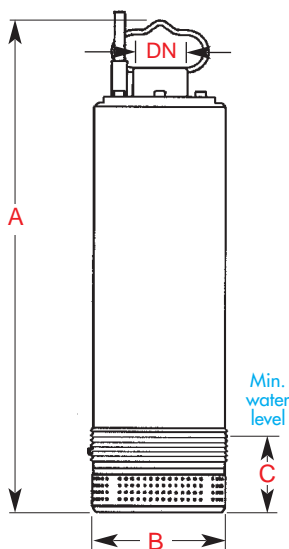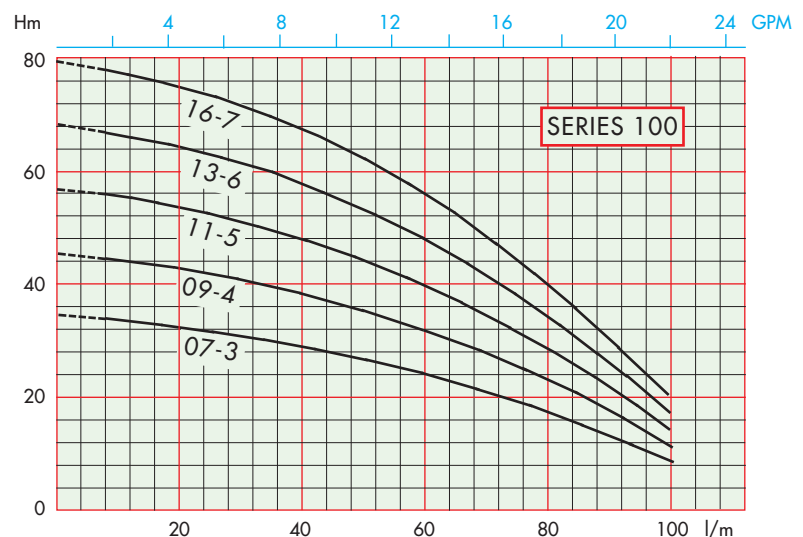

Single
Phase
Float
Switch
Option



| MODEL SRM or SRT | NOMINAL | | NOM. AMPS | | 230V μ | DIMENSIONS mm | | | | WEIGHT Kg |
|---------------------|---------|------|-------------|-----|-----------|---------------|-----|----|--------|--------------|
| | kW | HP | 230V - 400V | | | A | B | C | DN | |
| SRM 07-3/100 | 0.50 | 0.70 | 4.2 | - | 16 | 437 | 130 | 80 | 1 1/4" | 11.7 |
| SRM/T 09-4/100 | 0.65 | 0.90 | 5.0 | 2.0 | 16 | 461 | 130 | 80 | 1 1/4" | 12.2 |
| SRM/T 11-5/100 | 0.80 | 1.10 | 6.6 | 2.5 | 20 | 500 | 130 | 80 | 1 1/4" | 13.4 |
| SRM/T 13-6/100 | 0.95 | 1.30 | 7.3 | 2.9 | 25 | 544 | 130 | 80 | 1 1/4" | 15.0 |
| SRM/T 16-7/100 | 1.20 | 1.60 | 8.7 | 3.2 | 31.5 | 588 | 130 | 80 | 1 1/4" | 16.7 |

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

