



SRT DIRTY WATER BOREHOLE PUMPS

Designed for 6" (150mm) wells

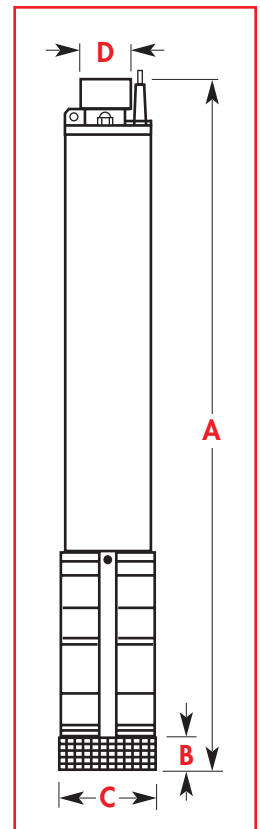

Multistage pumps designed specifically for 6" borehole and well applications, handling dirty water with entrained solids up to a max. 5mm diameter. They are suitable for pumped media temperatures up to 30°C with acidity ranging from 6 to 10 pH.

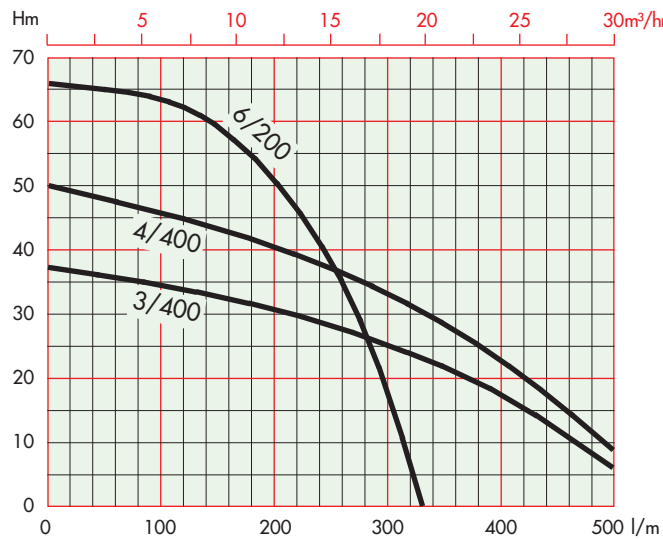

Materials

- Motor Housing: Stainless Steel
- Pump Cylinder Body: Stainless Steel
- Shaft, Tie Rods, Suction Grid: Stainless Steel
- Impellers/Diffusers: Glass Reinforced Noryl
- Body, Discharge Head, Foot: Cast Iron
- Mech. Seal: Graphite/Ceramic • Rings: NBR

TECHNICAL DATA

MODEL	NOMINAL		NOM. AMP	DIMENSIONS mm				WEIGHT Kg
	kW	HP		A	B	C	D	
SRT40-3/400	3.0	4.0	7.5	1141	60	142	2"	40.0
SRT55-4/400	4.0	5.5	10.0	1240	60	142	2"	44.5
SRT55-6/200	4.0	5.5	10.0	1322	60	142	2"	48.5

Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

