



# SEMISOM 265L

## submersible pumps for dirty water and sewage

These Semisom submersible pumps have been designed for arduous dirty water and sewage type applications.

They feature vortex impellers providing a maximum solids handling capability of 35mm.

- Cast iron/Stainless steel construction
- Coolant filled motor
- Mechanical seal and lip seal
- 10 metre cable on all 230/400V models
- 10/20 metre cables on 110V models with capacitor box
- Float switch available on single phase models
- 230V models have choice of bare cable with internal capacitor or UK plug unit incorporating capacitor and trip.

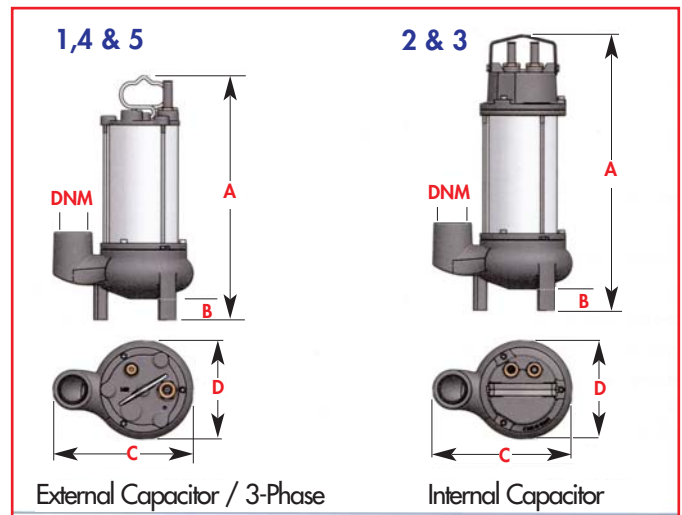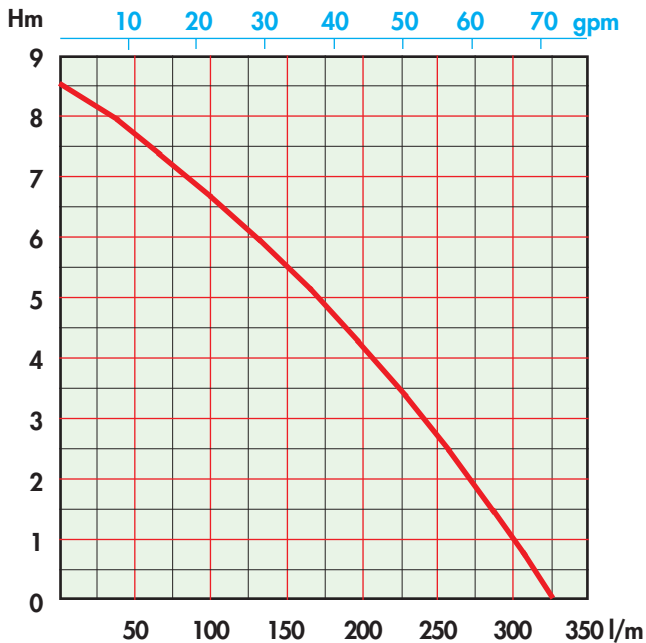

1. 110/1/50, Auto.....Code: 265LMG-110V
2. 230/1/50, Manual, Integral capacitor.....Code: 265LMIC-230V
3. 230/1/50, Auto, Integral capacitor.....Code: 265LMGIC-230V
4. 230/1/50, Auto, UK Plug with thermal switch/capacitor.....Code: 265LMGSUK-230V
5. 400/3/50, Manual.....Code: 265LT-400V

TECHNICAL DATA																
MODEL	NOMINAL		NOMINAL AMP			Int. Capacitor Dim. mm					Ext. Capacitor/3~ Dim. mm					WEIGHT Kg
	kW	HP	110V	230V	400V	A	B	C	D	DNM	A	B	C	D	DNM	
265L	0.55	0.75	8.5	4.2	1.7	454	50	230	162	1 1/2"	400	50	230	162	1 1/2"	14-16

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

