

# TELLARINI SERIES AL PULLEY DRIVE STAINLESS LIQUID RING TRANSFER PUMPS



## Self priming pulley drive pumps

- Capacities from 10 to 200 l/min.
- Max head 40m. • Max suction 6m.
- Suitable for a wide range of clean liquids such as water, seawater, chemicals, fertilisers etc.
- Reverse flow capability
- Models 20/25 = Pulley 1A72
- Models 40/50 = Pulley 2A72

## MATERIAL SPECIFICATION






- Pump body, Impeller and shaft: AISI 316
- Bearing housing 25 and 40 = Bronze
- Bearing housing 20 and 50 = Aluminium

## SEALS

- Mechanical seal: Ceramic/Graphite/NBR (>90°C)

### Option:

- Mechanical seal Ceramic/Graphite/Viton - (>130°C)
- Mechanical seal AISI 316/Graphite/Teflon

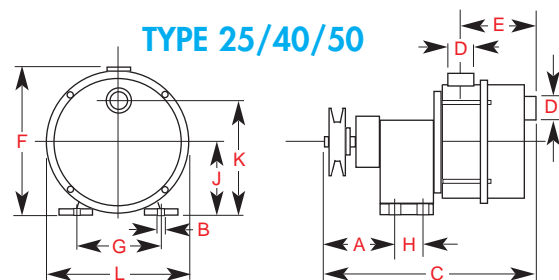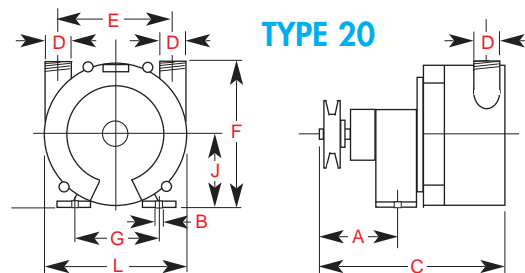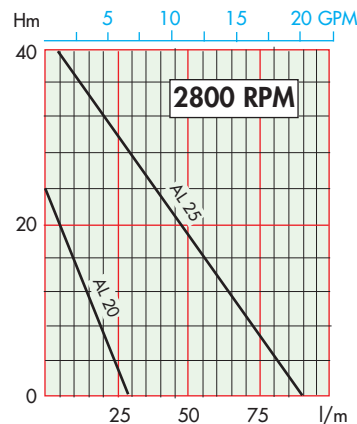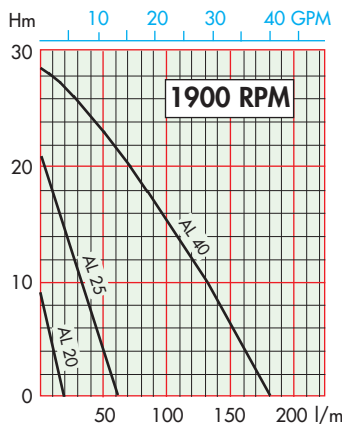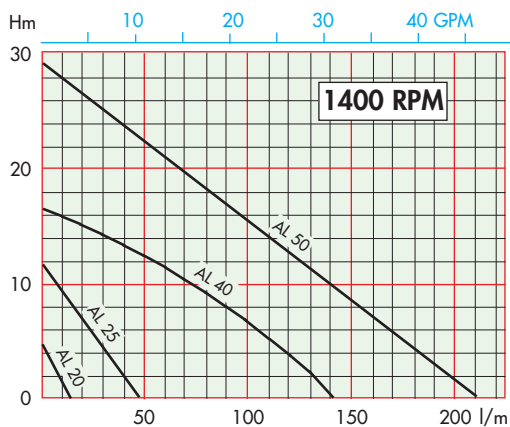

DIMENSIONS											WEIGHT PULLEY BEARING CASE			
TYPE	A	B	C	D	E	F	G	H	J	K	L	KG	TYPE	CASE
AL 20	78	9	160	3/4" M	68	116	88	-	59	-	110	2.0	1A72	ALI.
AL 25	72	9	220	1" F	78	139	96	28	66	105	144	3.7	1A72	BRONZE
AL 40	83	9	302	1 1/4" F	100	175	125	46	90	135	166	6.9	2A72	BRONZE
AL 50	86	9	322	2" F	106	206	140	54	105	159	200	8.3	2A72	ALI.

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

