


TELLARINI SERIES AL STAINLESS STEEL LIQUID RING TRANSFER PUMPS

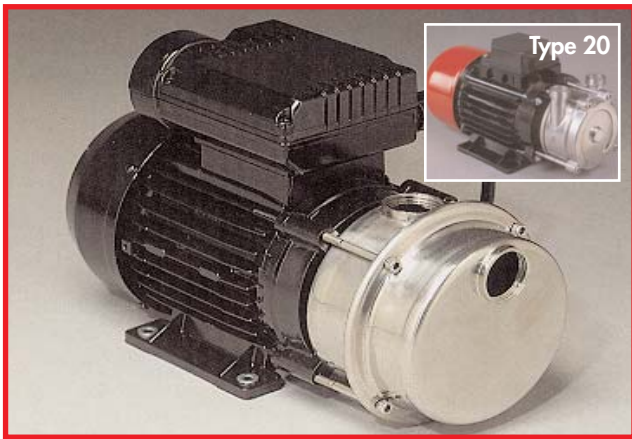

Self priming liquid ring pumps

- Capacities from 20 to 200 l/min.
- Max head 42m. • Max suction 6m.
- Reverse flow switch facility (AC models)
- 12 and 24V DC, 240V 1-phase and 415V 3-phase models (110V 1-phase on special order)
- Belt/Pulley drive models also available
- Suitable for corrosive liquids

MATERIAL SPECIFICATION

- Pump body, Impeller, Shaft: AISI 316

SEALS




- Mechanical seal: Ceramic/Graphite/NBR

Options:

- Mechanical seal Ceramic/Graphite/Viton
- Mechanical seal Ceramic/Graphite/PTFE

ELECTRICAL SPECIFICATION

- Continuous duty 12/24V DC (AL), 240V single phase (ALM) 415V 3-phase (ALT) motors
- Protection: IP44 all AC models
Protection: IP23 all DC models

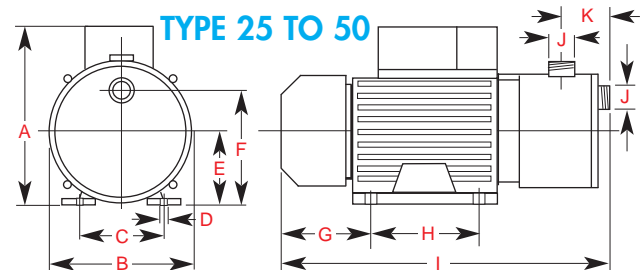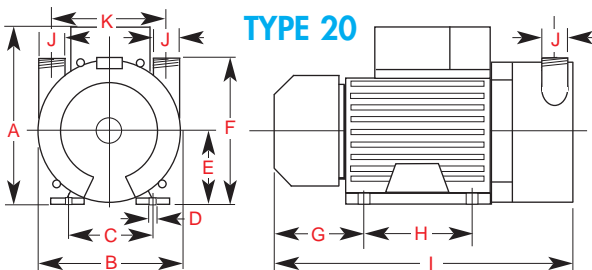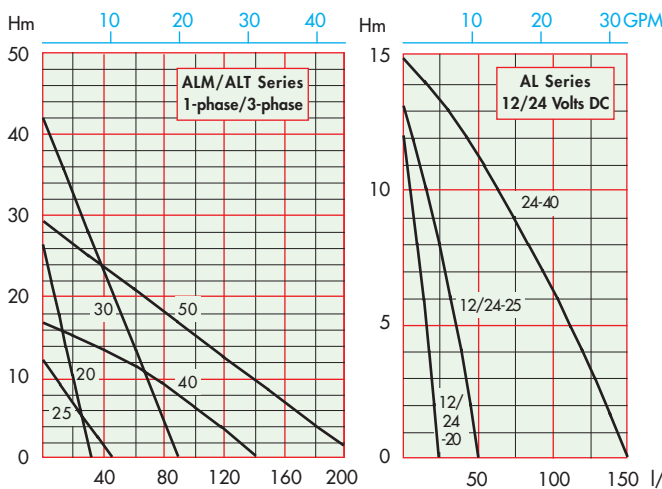

TYPE DC	TYPE 1-phase	TYPE 3-phase	HP	RPM	DIMENSIONS mm					WEIGHT Kg						
					A	B	C	D	E		F	G	H	I	J	K
AL12/20			0.3	2400	154	122	100	7	63	121	100	80	283	3/4"	69	5.1
AL24/20			0.3	2400	154	122	100	7	63	121	100	80	283	3/4"	69	5.1
AL12/25			0.6	1700	172	144	112	7	71	112	101	90	355	1"	90	8.9
AL24/25			0.6	1800	172	144	112	7	71	112	101	90	355	1"	90	8.9
AL24/40			1.0	1500	209	178	140	9	90	133	136	100	438	1 1/2"	115	14.7
	ALM 20	ALT 20	0.5	2800	190	120	100	7	63	121	66	80	248	3/4"	69	5.9
	ALM 25	ALT 25	0.6	1400	189	144	115	9	71	112	75	90	317	1"	82	9.0
	ALM 30	ALT 30	2.0	2800	208	160	125	9	80	122	85	100	347	1"	82	13.3
	ALM 40	ALT 40	1.2	1400	208	160	125	9	80	113	85	100	382	1 1/2"	111	13.9
	ALM 50	-	2.0	1400	237	200	140	9	90	144	100	125	438	2"	118	19.8
	-	ALT 50	2.5	1400	237	200	140	9	90	144	100	125	438	2"	118	19.8

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

