


# TELLARINI SERIES ECC 12/24V BRONZE LIQUID RING TRANSFER PUMPS

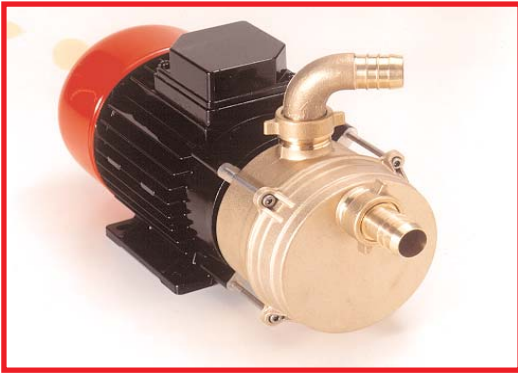

## Self priming liquid ring pumps

- Capacities from 20 to 160 l/min.
- Max head 15m. • Max suction 6m.
- Suitable for a wide range of clean liquids such as water, seawater, oil, diesel etc.
- Maximum liquid density 1.1g/cm<sup>3</sup>
- Motor protection IP23

## MATERIAL SPECIFICATION




- Pump body and Impeller: Bronze
- Shaft (20): Stainless steel AISI 304
- Shaft (25/40): Stainless AISI 316

## SEALS

- Lip seal: NBR as standard (>90°C)

### Option:

- Lip seal in Viton (>130°C)
- Mechanical seal Ceramic/Graphite/NBR - (>90°C)
- Mechanical seal Ceramic/Graphite/Viton - (>130°C)

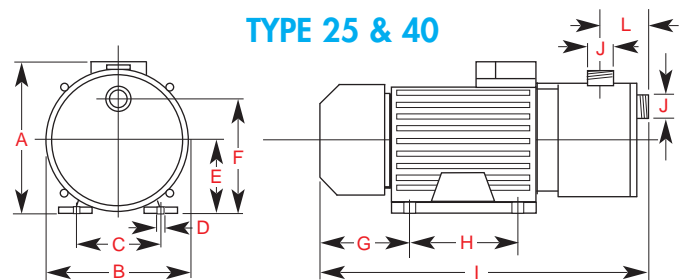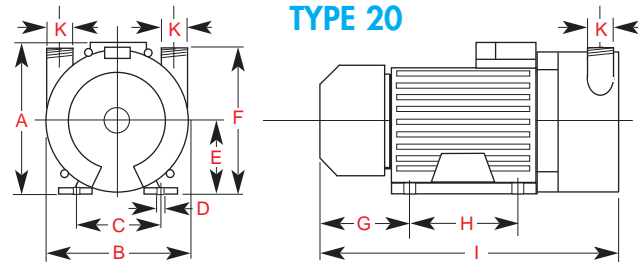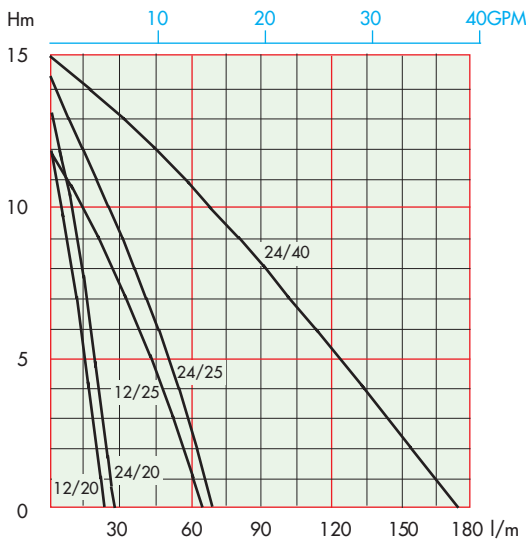

## TECHNICAL DATA

TYPE	HP	MAX. AMP	RPM	WEIGHT Kg
ECC 12/20	0.3	20	2400	5.1
ECC 24/20	0.3	12	2400	5.1
ECC 12/25	0.6	37	1500	9.0
ECC 24/25	0.6	20	1600	9.0
ECC 24/40	1.0	42	1500	14.9

## DIMENSIONS

TYPE	A	B	C	D	E	F	G	H	I	J	K	HOSE TAIL FITTINGS	L
ECC 12/20	154	122	100	7	63	121	100	80	283	-	3/4"	20MM	68
ECC 24/20	154	122	100	7	63	121	100	80	283	-	3/4"	20MM	68
ECC 12/25	172	140	112	7	71	110	101	90	343	1"	-	25MM	81
ECC 24/25	172	140	112	7	71	110	101	90	343	1"	-	25MM	81
ECC 24/40	208	178	140	9	90	135	135	100	428	1 1/2"	-	40MM	103

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

