


TELLARINI SERIES ENM/ENT BRONZE LIQUID RING TRANSFER PUMPS

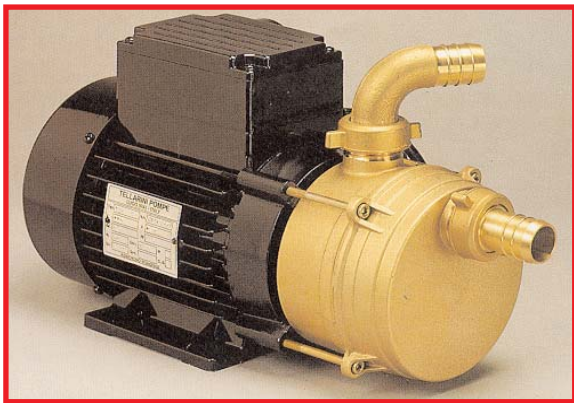

Self priming liquid ring pumps

- Capacities from 32 to 262 l/min.
- Max head 48m. • Max suction 6m.
- Reverse flow switch facility.
- Motor protection: IP44
- 1400rpm motors except 20/25S = 2800rpm
- 110/230V 1-phase and 400V 3-phase
- Suitable for a wide range of clean liquids such as water, seawater, diesel etc. without hard particles such as sand.

Not for use with petrol or solvents.

- Max. liquid density 1.1g/cm³

MATERIAL SPECIFICATION




- Pump body and Impeller: Bronze
- Shaft: Stainless steel AISI 316

SEALS

- Mechanical seal Ceramic/Graphite/NBR

Options:

- Mechanical seal Ceramic/Graphite/Viton
- Lip seal and body O-Ring in NBR (>90°C)
- Lip seal and body O-Ring in Viton (>130°C)

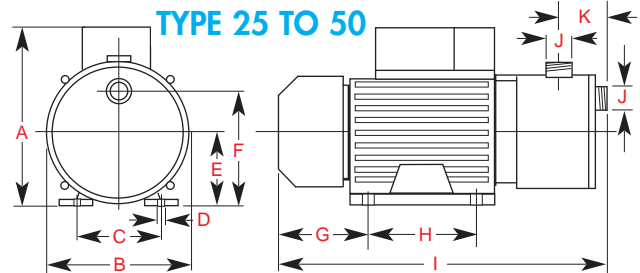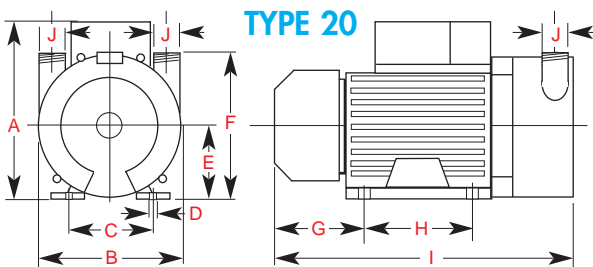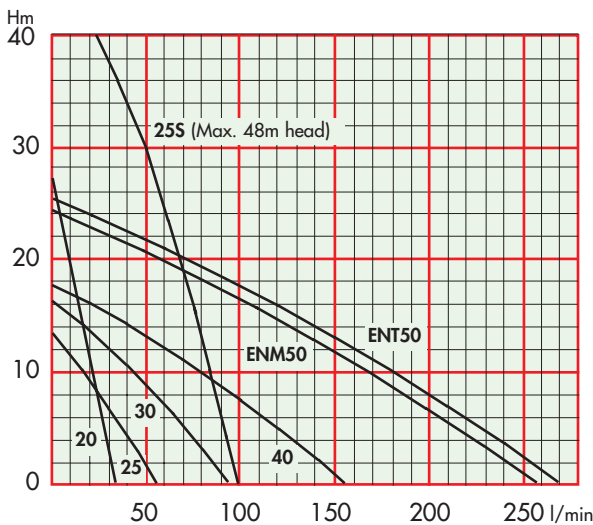

TYPE 1-phase	TYPE 3-phase	HP	DIMENSIONS											HOSE TAILS	WEIGHT Kg
			A	B	C	D	E	F	G	H	I	J	K		
ENM 20	ENT 20	0.5	190	120	100	7	63	121	66	80	248	3/4"	-	20	5.9
ENM 25S	ENT 25S	2.0	209	162	126	9	80	119	88	100	348	1"	81	25	13.3
ENM 25	ENT 25	0.6	190	141	112	7	71	110	77	90	318	1"	81	25	9.0
ENM 30	ENT 30	1	209	162	126	9	80	125	88	100	376	1.1/2"	103	30	11.9
ENM 40	ENT 40	1.2	209	162	126	9	80	125	88	100	376	1.1/2"	103	40	13.8
ENM 50	ENT 50	2	236	202	140	9	90	144	102	125	431	2"	105	50	20.7
	ENT 50	2.5	236	202	140	9	90	144	102	125	431	2"	105	50	20.7

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

