


TELLARINI SERIES I PULLEY DRIVE BRONZE LIQUID RING TRANSFER PUMPS

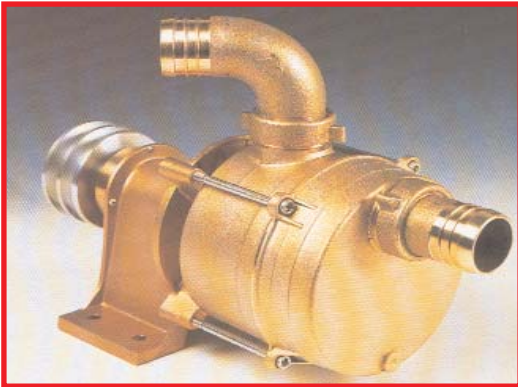

Self priming pulley drive pumps


- Capacities from 10 to 350 l/min.
- Max head 60m. • Max suction 6m.
- Suitable for a wide range of clean liquids such as water, seawater, diesel, fertilisers etc.
- Reverse flow capability
- Models 20/25/30 = Pulley 1A72
- Models 40/50 = Pulley 2A72

MATERIAL SPECIFICATION




- Pump body, Impeller: Bronze - Shaft : AISI 304
- Bearing housing 20 and 50 = Aluminium
- Bearing housing 25/30/40 = Bronze

SEALS

- NBR Lip seal as standard (>90°C)
- Options:* • Viton Lip seal (>130°C)
- Mechanical seal Ceramic/Graphite/NBR (>90°C)
- Mechanical seal Ceramic/Graphite/Viton - (>130°C)

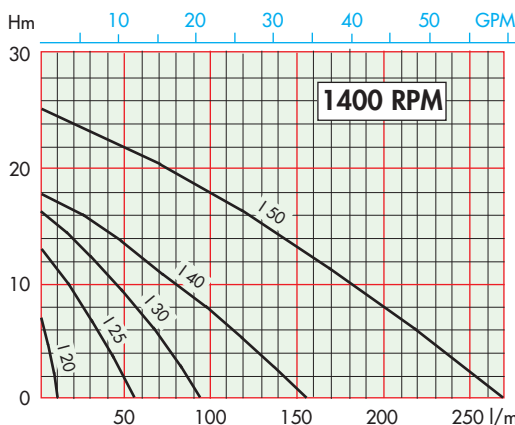

All pumps are supplied with hose/tail fittings matching their model number. e.g. 1.25 = 25mm

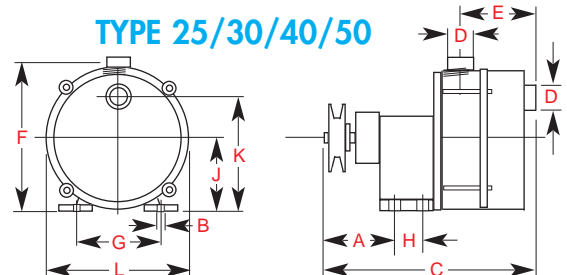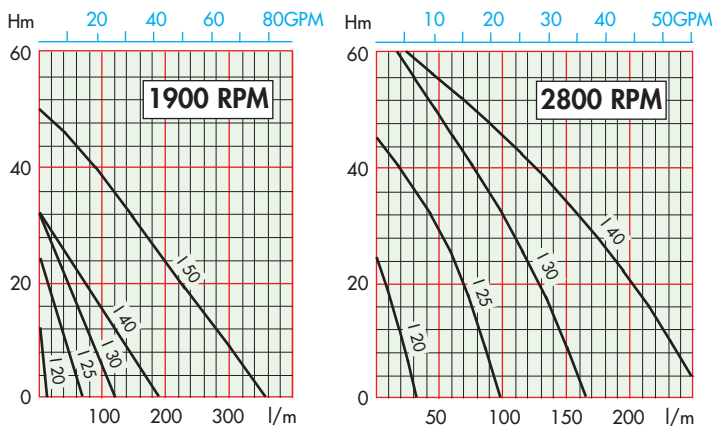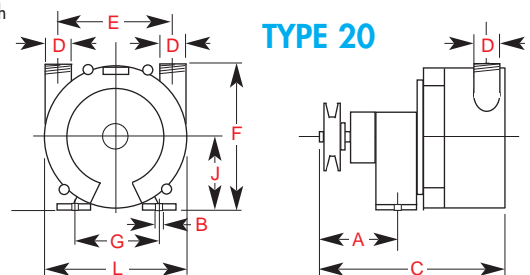

DIMENSIONS												WEIGHT PULLEY BEARING CASE		
TYPE	A	B	C	D	E	F	G	H	J	K	L	KG	TYPE	CASE
1.20	78	9	160	¾" M	68	116	88	-	59	-	110	2.0	1A72	ALI.
1.25	70	9	219	1" M	81	146	96	28	66	105	126	3.8	1A72	BRONZE
1.30	77	9	298	1½" M	103	180	125	46	90	135	158	6.4	1A72	BRONZE
1.40	83	9	304	1½" M	103	180	125	46	90	135	158	7.1	2A72	BRONZE
1.50	86	9	325	2" M	105	219	140	54	105	158	200	9.4	2A72	ALI.

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

