

# TURBO 300/500


## High head, dual impeller submersible pumps





Extremely compact and robust 400/3/50 drainage pumps, that also offer an economic alternative to certain borehole, well and surface multistage pump applications. Both models are suitable for a 12" dia opening.

Designed for high reliability and long service life, these pumps feature:

- Cast iron motor housing, casing and base.
- Stainless steel shaft, impellers, strainer and handle.
- Double seal system, the pump side being Sil. Carb.
- Oil bath motor and mechanical seal.
- IP68 Protection - Class 'F' Insulation.
- Max. submergence depth 20m.
- Max. pumped liquid temperature 35°C.
- 10m H07RNF cable as standard.

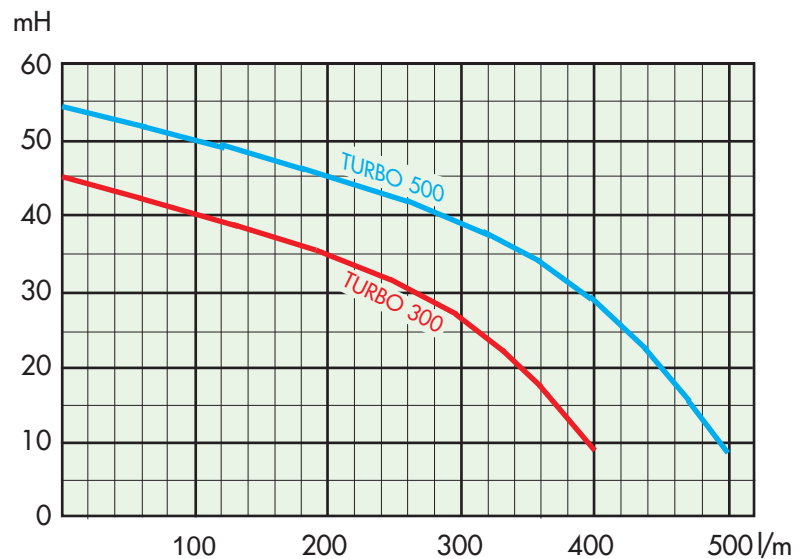

*\*It is highly recommended that a good quality non-return valve is fitted in the discharge line.*

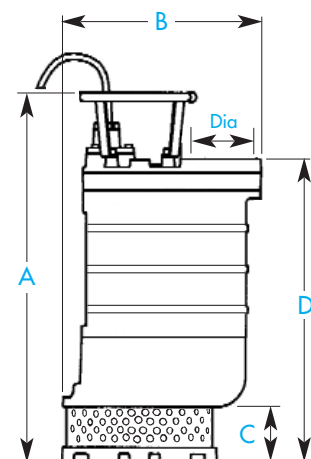

### TECHNICAL DATA

MODEL	ELECTRICAL DATA				DIMENSIONS mm					WEIGHT Kg
	kW P <sub>1</sub>	Kw P <sub>2</sub>	HP	AMP	A	B	C	D	Dia	
TURBO 300	4.0	2.2	3.0	7.0	543	299	80	445	3" F	60
TURBO 500	6.0	3.7	5.0	9.8	543	299	80	445	3" F	62

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

