

TURBO 750/1000

High head, dual impeller submersible pumps






Extremely compact and robust 400/3/50 drainage pumps, that also offer an economic alternative to certain borehole, well and surface multistage pump applications. Both models are suitable for a 13.5" dia opening.

Designed for high reliability and long service life, these pumps feature:

- Cast iron motor housing, casing and base.
- Stainless steel shaft, impellers, strainer and handle.
- Double seal system, the pump side being Sil. Carb.
- Oil bath motor and mechanical seal.
- IP68 Protection - Class 'F' Insulation.
- Max. submergence depth 20m.
- Max. pumped liquid temperature 35°C.
- 10m H07RNF cable as standard.

**It is highly recommended that a good quality non-return valve is fitted in the discharge line.*

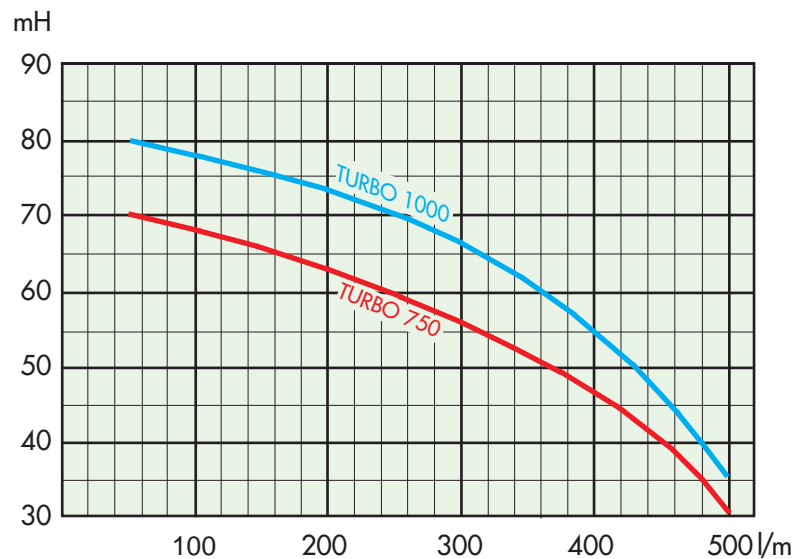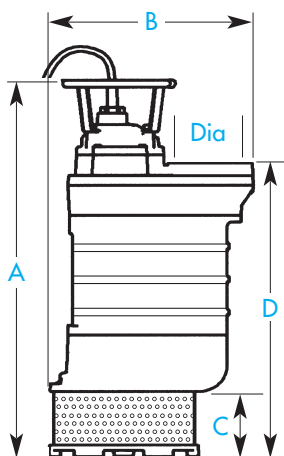

TECHNICAL DATA										
MODEL	ELECTRICAL DATA				DIMENSIONS mm					WEIGHT Kg
	400/3/50	kW P ₁	Kw P ₂	HP	AMP	A	B	C	D	
TURBO 750	7.3	5.5	7.5	12.6	645	318	120	533	4" F	82
TURBO 1000	10.1	7.5	10.0	20.0	645	318	120	533	4" F	92

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

