

G-CMV/G-CTV AUTOMATIC PRESSURE SETS

Series 110/230/330 Vertical Multistage



Pressure sets are available with either conventional control panel (G) or Inverter drive option (GI).





Twin pump automatic pressure sets featuring Series 110/230/330 vertical multistage pumps, available in both 230/1/50 and 400/3/50. Designed for alternating duty/assist applications, providing a flexible and economical solution for a wide range of service requirements.

A pressure set is assembled on a single frame with the control panel mounted on a telescopic clamp, or inverters above the pump motors.

The system wet-end comprises two matching vertical multistage pumps; inlet manifold with check valves and ball valves; zinc coated steel outlet manifold connected to pumps via ball valves; one pressure switch per pump mounted on the outlet manifold for automatic stop/start; pressure gauge.

Total duty based on both pumps operating together

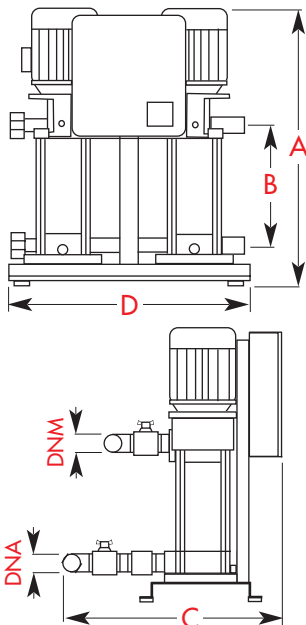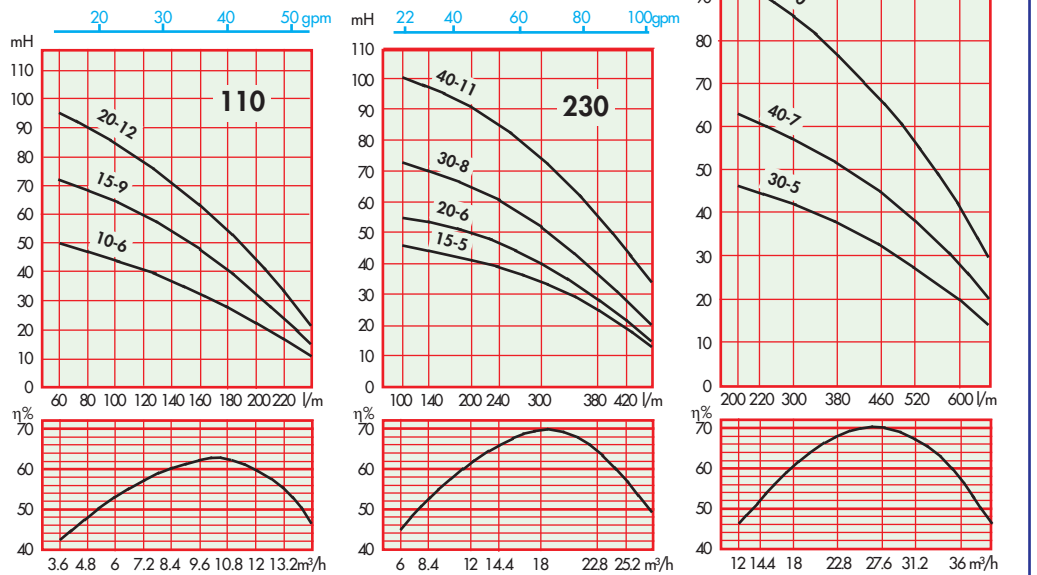

230/1/50 Model	400/3/50 Model	Power kW	Power HP	Nom Amp	A	B	C	D	DNA	DNM	Weight kg
G-CMV10-6/110	-	0.75-0.75	1.1-1.1	6.2-6.2	712	286	620	600	2"	1½"	64.4
G-CMV15-9/110	-	1.1-1.1	1.5-1.5	8.0-8.0	802	376	620	600	2"	1½"	71.6
G-CMV15-5/230	-	1.1-1.1	1.5-1.5	8.0-8.0	712	286	620	600	2"	2"	69.2
G-CMV20-6/230	-	1.5-1.5	2.0-2.0	10.9-10.9	765	322	620	600	2"	2"	72.6
G-CMV30-8/230	-	2.2-2.2	3.0-3.0	16.5-16.5	891	394	620	600	2"	2"	81.4
G-CMV30-5/330	-	2.2-2.2	3.0-3.0	16.5-16.5	783	286	770	600	3"	2"	83.2
-	G-CTV10-6/110	0.75-0.75	1.1-1.1	1.9-1.9	712	286	620	600	2"	1½"	62.0
-	G-CTV15-9/110	1.1-1.1	1.5-1.5	2.7-2.7	802	376	620	600	2"	1½"	69.6
-	G-CTV20-12/110	1.5-1.5	2.0-2.0	3.3-3.3	909	466	620	600	2"	1½"	72.6
-	G-CTV15-5/230	1.1-1.1	1.5-1.5	2.7-2.7	715	286	620	600	2"	2"	67.2
-	G-CTV20-6/230	1.5-1.5	2.0-2.0	3.3-3.3	765	322	620	600	2"	2"	68.6
-	G-CTV30-8/230	2.2-2.2	3.0-3.0	5.3-5.3	891	394	620	600	2"	2"	81.4
-	G-CTV40-11/230	3.0-3.0	4.0-4.0	6.8-6.8	1001	502	620	600	2"	2"	100.0
-	G-CTV30-5/330	2.2-2.2	3.0-3.0	5.3-5.3	753	286	770	600	3"	2"	80.2
-	G-CTV40-7/330	3.0-3.0	4.0-4.0	6.8-6.8	857	358	770	600	3"	2"	96.6
-	G-CTV55-10/330	4.0-4.0	5.5-5.5	8.5-8.5	965	466	770	600	3"	2"	102.0

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

